



6FM50G (12V50Ah)

LONGWAY® Standard battery is design for a general purpose by KaiYing Power. 6FM50G is a general purpose battery up to 5 years in star service or more than 260 cycles at 100% discharge in cycle service. As with all LONGWAY® batteries, all are rechargeable highly efficient, leak proof and maintenance free.



ISO 9001:2008 Standard




ISO 14001:2004 Standard



Specifications:

Cells per Unit	6
Normal Voltage	12V
Capacity	50Ah@20Hr-rate to 1.75V per cell@25°C
Weight	Approx.16.0kg (35.27lbs)
Maximum Discharge Current	250A(5sec)
Internal Resistance	Approx. 6.5mΩ full charged @25°C
Operating Temperature Range	Discharge: -20°C~60°C Charge: 0°C~50°C Storage: -20°C~60°C
Nominal Operating Temperature Range	25°C±3°C
Float Charging Voltage	13.7~13.9VDC/unit Average @25°C
Maximum Charging Current	12.50A
Equalization and Cycle Service	14.4V~15.0VDC/unit Average @ 25°C
Self Discharge	LONGWAY Valve Regulated Lead Acid (VRLA) batteries can be stored for more than 6 months at 25°C. Self-discharge ratio less than 3% per month at 25°C. Please charge batteries before using.
Terminal	Terminal I4
Container Material	ABS(UL94-HB) *Flammability resistance of (UL94-V0) can be available upon request

Dimensions: L258*W169*H175(TH180)mm

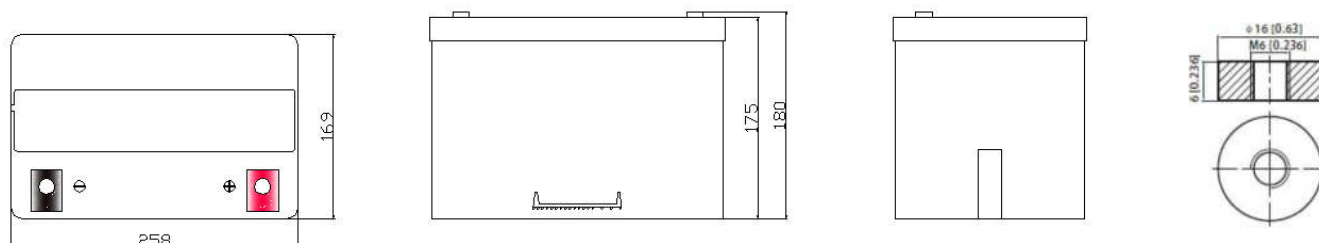


Constant Current Discharge Characteristics (A, 25 °C)

F.V/TIME	5min	10min	15min	30min	60min	2h	3h	5h	8h	10h	20h
9.60	125.0	100.0	85.0	55.0	30.00	18.54	12.94	8.88	6.02	5.08	2.664
9.90	121.3	97.0	83.3	53.9	29.40	18.45	12.88	8.84	5.96	5.05	2.651
10.2	118.8	95.0	81.6	52.8	28.80	18.18	12.75	8.75	5.94	5.03	2.641
10.5	115.0	92.0	79.1	51.2	27.90	18.00	12.62	8.66	5.90	5.01	2.632
10.8	97.5	89.3	77.5	50.2	27.36	17.82	12.50	8.58	4.72	5.00	2.625


Constant Power Discharge Characteristics (Watt, 25 °C)

F.V/TIME	5min	10min	15min	30min	60min	2h	3h	5h	8h	10h	20h
9.60	1313	1080	938	627	347.4	214.7	152.2	105.0	72.2	60.6	31.97
9.90	1273	1048	919	614	335.2	213.7	151.4	104.5	71.5	60.3	31.82
10.2	1247	1026	900	602	328.3	210.5	149.9	103.4	71.2	60.1	31.69
10.5	1208	994	872	583	318.1	208.4	148.4	102.4	70.8	59.8	31.58
10.8	1024	964	855	572	311.9	206.3	146.9	101.4	56.6	59.7	31.50


Trickle (or Float) Service Life

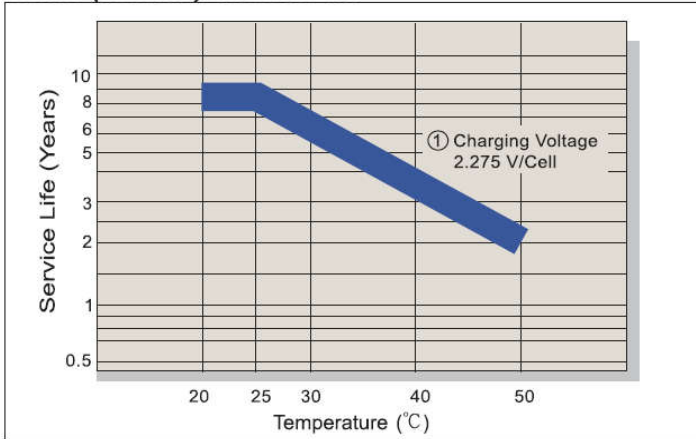


Capacity Retention Characteristic

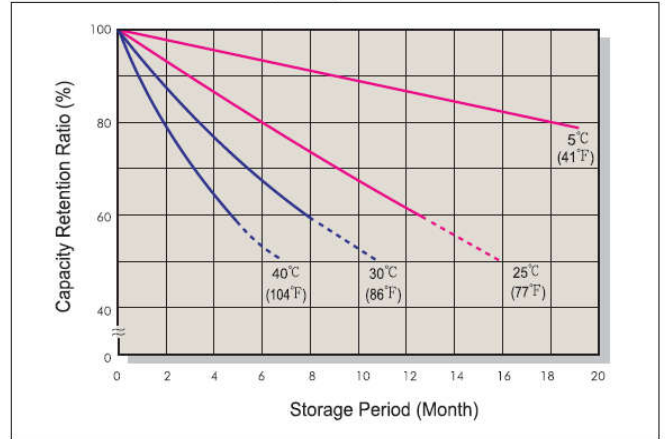


Battery Voltage and Charge Time for Standby Use

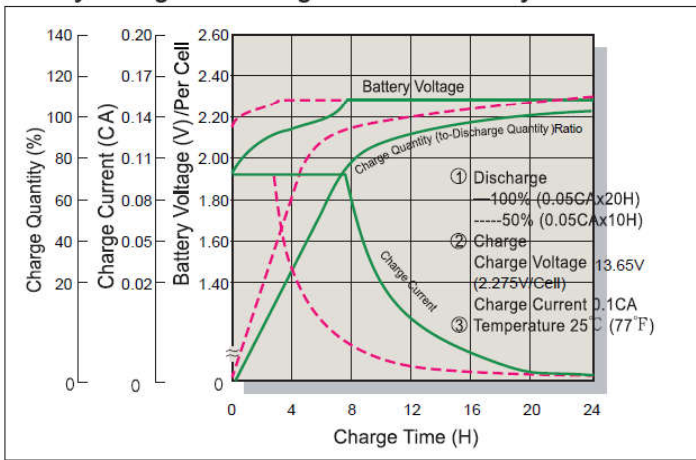


Cycle Service Life

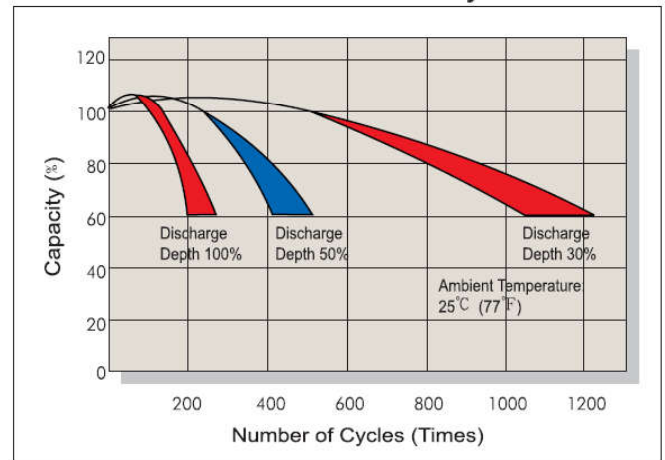

Battery Voltage and Charge Time for Cycle Use

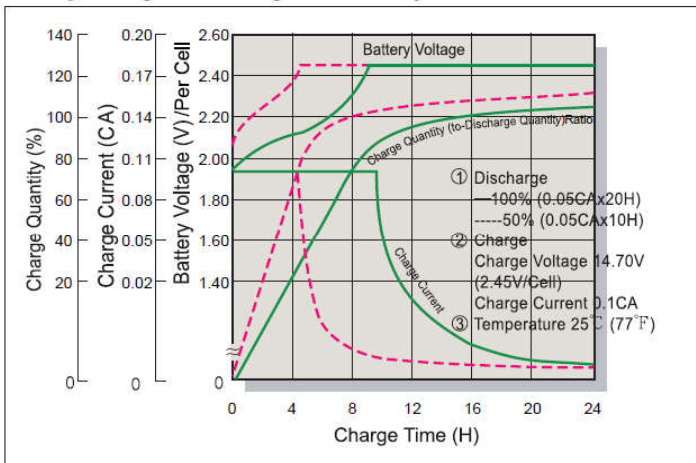

Terminal Voltage (V) and Discharge Time

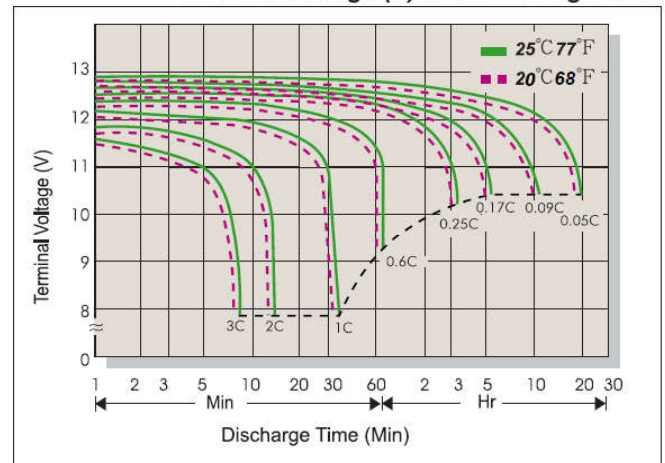

Charging Procedures

Application	Charge Voltage(V/cell)			Max. Charge Current
	Temperature	Set Point	Allowable Range	
Cycle Use	25°C(77°F)	2.45	2.40~2.50	0.25C
Standby	25°C(77°F)	2.275	2.25~2.30	

Discharge Current VS. Discharge Voltage

Final Discharge Voltage V/cell	1.75	1.70	1.65	1.60
Discharge Current (A)	0.2C > (A)	0.2C < (A)	0.5C < (A)	(A) > 1.0C

KaiYing Power Supply & Electrical Equip Co., Ltd.

Address: KaiYing Industrial Park, ChengXiang Town, Anxi, Quanzhou, Fujian China

Tel: 86-595-68782266 Fax: 86-0595-68782222

Website: www.longwaybattery.com Email: Sales@longwaybattery.com